

HSF



RoHS

SPECIFICATION

Current Rating: 1.0Amp
Insulation Resistance: 1000M Ω min
Contact Resistance: 20M Ω max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40° C to +105° C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PA6T+30%GF UL 94V-0

Ordering Code:

BHBS02 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

06 08 10 14
16 20 26 30
34 40 50 60
80 100


③ Contact Plating:

G0:Gold flash S0:Selective
G1:3u" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin




④ Color Insulator
B:Black
U:Blue
W:White

⑤ Insulator Material
A:PBT
B:PA6T
C:LCP
D:PA46
E:PA9T

⑥ Packing
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP

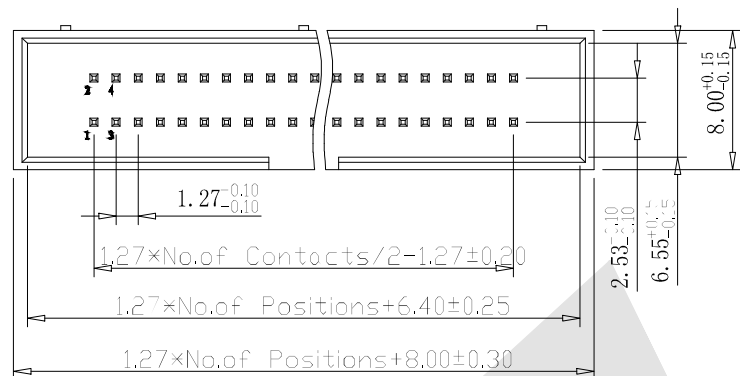

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ± 0.05)

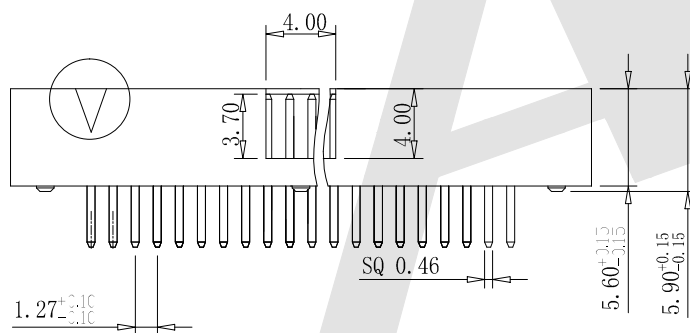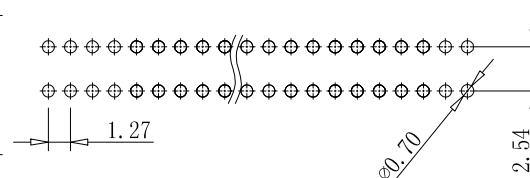

Unless Otherwise specified tolerance
X. ± 0.35 X.XX: ± 0.20
X.X: ± 0.25 X.XXX: ± 0.15

SCALE: As Shown UNIT: mm
DRAW Wu Feng Rong DATE 12/05/2020
CHECK BobYang DATE 01/05/2016



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:

1.27*2.54mm Box Header 180° H=5.90

DRAWING NO: BHBS02-XXXXX

PRODUCT NO: BHBS02-XXXXX

REV

DESCRIPTION

DATE