

HSF




RoHS

SPECIFICATION

Current Rating: 3.0Amp
Insulation Resistance: 1000MΩ min
Contact Resistance: 20MΩ max
Withstand Voltage: 500V AC/DC
Operating Temperature: -40°C to +105°C
Contact Material: Brass
Contact Plating: Au or Sn Over Ni
Insulator Material: PBT/PA6T+30%GF UL 94V-0

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)



Ordering Code:

BHDR01 - X - X - X - X - X
① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts

06 08 10 12 14 16 18

20 22 24 26 28 30 32

34 36 40 44 48 50 60

64

③ Contact Plating:

G0:Gold flash S0:Selective

G1:3U" Gold S1:Selective 3u"

G2:5u" Gold S2:Selective 5u"

G3:10u" Gold S3:Selective 10u"

G4:15u" Gold S4:Selective 15u"

G5:30u" Gold S5:Selective 30u"

SN:Tin

④ Color Insulator

B:Black

U:Blue

G:Gray

⑤ Insulator Material

A:PBT

B:PA6T

C:LCP

D:PA46

E:PA9T

⑥ Packing

A:Tray




B:Bag

T:Tube

U:Tube+CAP

R:Tape&Reel

W:Tape&Reel+CAP

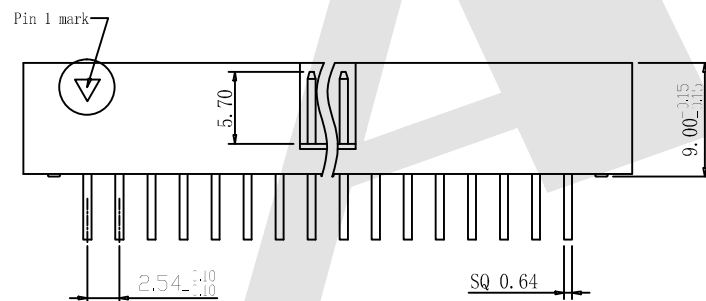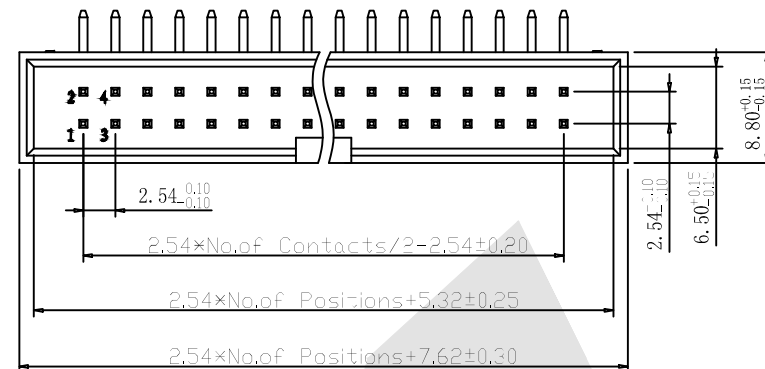

Unless Otherwise specified tolerance

X. ±0.35

X.XX: ±0.20

X.X: ±0.25

X.XX: ±0.15

SCALE:

As Shown

UNIT:

mm


DRAW

DATE

CHECK

DATE

BobYang



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD

Http://www.antenk.com

E-mail:sales@antenk.com

TITLE:

2.54mm Box Header 90° H=9.0

DRAWING NO:

BHDR01-XXXXX

PRODUCT NO:

BHDR01-XXXXX

REV

DESCRIPTION

DATE